


Mi True Wireless Earphones 2

User Manual



Read this manual carefully before use, and retain it for future reference.

Product Overview

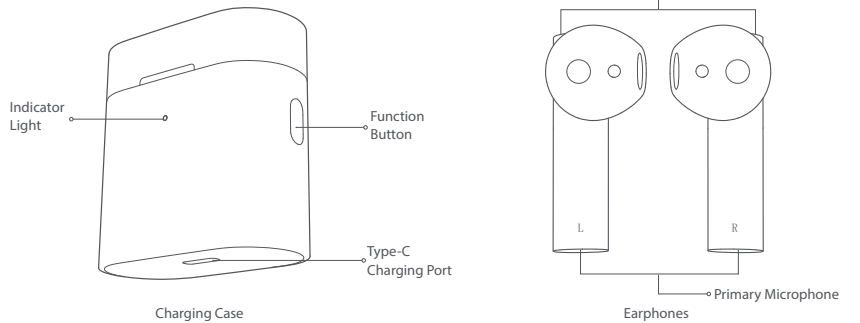

Illustrations of product, accessories, and user interface in the user manual are for reference purposes only. Actual product and functions may vary due to product enhancements.

Instructions

- Charging**
- Charging the earphones
When the earphones are placed in the charging case, they will automatically start charging.
 - Charging the charging case
The indicator blinks red while charging, and turns white when fully charged.
Note: Prior to first use, the earphones are deactivated. To activate them, place them into the charging case, and press the function button for 5 seconds. We recommend fully charging the earphones before using them for the first time.
 - Checking Battery Level
Checking the battery level of the earphones
After connecting the earphones to a phone, you can check the earphones' battery level on the phone's status bar.
Note: The phone's status bar always displays the battery level of the earphone with the lowest battery level. This feature is not supported by some phones.
 - Checking the battery level of the charging case
Open the charging case's lid, or press the function button if the lid is closed:
- When the indicator light of the charging case stays lit for 5 seconds, it means the battery is sufficient.


- When the charging case's indicator light is blinking, it means the battery level is low and should be charged immediately.
- Checking the battery level by a Mi phone
After successfully connecting to a phone, place the earphones into the charging case and close its lid. Make sure the Bluetooth function is enabled on your Mi phone. Hold your phone close to the charging case, then open the case's lid. A notification will appear on the phone, then you can check the battery level of the earphones and the charging case.
Note: When checking the battery level on your phone, please update your Mi phone to the latest stable version. This feature is currently only supported by some Mi phones.
 - Turning On
When opening the charging case, the earphones will automatically turn on.
 - Sleep Mode
Place the earphones back into the charging case and close the lid, the earphones will disconnect and go into sleep mode automatically.
 - Wearing
Take the earphones out of the charging case, and insert them into your ears according to the left (L) and right (R) marks.
Note: After using the earphones, place them back into the charging case. This will extend their lifespan and help you avoid losing or misplacing them.

Connecting

- Connecting the earphones to a new device
- Place the earphones into the charging case, then press and hold the function button for 2 seconds. The charging case indicator light will start blinking, indicating that the earphones are waiting to be connected.
 - Enable the device's Bluetooth, then locate and connect to "Mi True Wireless Earphones 2". If a passcode is requested, enter "0000".
- Connecting the earphones with a Mi phone
Place the earphones into the charging case and close its lid. Make sure the Bluetooth function is enabled on your Mi phone. Hold your phone close to the charging case, then open the case's lid. Follow the on-screen instructions of the phone to connect to the earphones.
Note: The feature to quickly connect is currently only supported by some Mi phones, please update your Mi phone to the latest stable version.
 - Connecting to two devices
Place one of the earphones into the charging case, then press and hold 1. the function button for 2 seconds. Use device A to search for and connect to the earphone.
After the first earphone is connected to device A, take the earphone out of the charging case. Now place the second earphone into the charging case and press and hold the function button for 2 seconds. Use device B to search for and connect to the earphone. This will connect each earphone to a separate device.

- Note: Before using this function, the connection history of each earphone needs to be cleared.
- Connection interrupted**
When a device's Bluetooth is disabled, or if the earphones are out of range, the earphones will automatically enter awaiting connection mode. If the earphones remain disconnected to a device for 10 minutes, they will enter sleep mode. Wearing the earphones again will wake them up and enter awaiting connection mode.
- Automatic connection**
While the earphones are in the charging case, opening the case will cause the earphones to automatically connect to the most recently used Bluetooth device. If no connection history is detected, or if the earphones cannot successfully connect to any Bluetooth device, the earphones will automatically enter the awaiting connection mode.
Note: If the earphones cannot automatically connect to a device, you will need to manually connect the earphones to the desired device via the device's Bluetooth settings.
Due to the connection characteristics of the Bluetooth signal, in dense environments with 2.4 GHz electromagnetic signal interferences, there may be occasional disconnects or no sound.
- Clearing connection history**
Place the earphones into the charging case.
Press and hold the function button on the charging case for more than 10 seconds. Once the indicator alternately blinks red and white, release the button.

- The connection history has been cleared and the indicator of the charging case blinks white. Then the earphones are awaiting for a pairing.
- Function Overview**



- Incoming calls**
Gently tap either one of the earphones twice: Answer/End calls
Music and voice assistant
While wearing both earphones:
Gently tap the right (R) earphone twice: Play/Pause music
Gently tap the left (L) earphone twice: Access the voice assistant
Taking out an earphone: Pause music
While wearing one earphone:
Gently tap the earphone twice: Play/Pause music

Note: The voice assistant function requires device support, and voice assistant needs to be authorized on the device.

Specifications

Model: TW5EJ06WM	Net Weight: 50 g
Charging Port: Type-C	Impedance: 32 Ω
Input: 5.2 V ±1 A	Charging Time: Approx. 1 h
Wireless Connectivity: Bluetooth 5.0	
Bluetooth Profiles: BLE/HFP/HSP/A2DP/AVRCP	
Supported Audio Codecs: SBC/AAC/LHDC	
Wireless Range: 10 m (open space without obstacles)	
Earphones' Battery Life (standalone): Approx. 4 h	
Total Battery Life (with charging case): Approx. 14 h	
Product Frequency Band: 2402-2480 MHz	
Maximum Transmit Power for BT: 10 dBm (Declaration for EU)	
Maximum Transmit Power for BLE: 10 dBm (Declaration for EU)	

WEEE Information

All products bearing this symbol are waste electrical and electronic equipment (WEEE as in directive 2012/19/EU) which should not be mixed with unsorted household waste. Instead, you should protect human health and the environment by handing over your waste equipment to a designated collection point for the recycling of waste electrical and electronic equipment, appointed by the government or local authorities. Correct disposal

and recycling will help prevent potential negative consequences to the environment and human health. Please contact the installer or local authorities for more information about the location as well as terms and conditions of such collection points.

Hereby, Tinlab declares that the radio equipment type Mi True Wireless Earphones 2 is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: <http://www.mi.com/global/service/support/declaration.html>

Safety Caution

Do not expose batteries or battery packs to excessive heat such as sunshine, fire or the like.

- Replacement of a battery with an incorrect type that can defeat a safeguard (such as catching fire, explosion, leakage of corrosive electrolyte etc).
- Disposal of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery, that can result in an explosion.
- Leaving a battery in an extremely high temperature surrounding environment that can result in an explosion or the leakage of flammable liquid or gas.

- A battery subjected to extremely low air pressure that may result in an explosion or the leakage of flammable liquid or gas.
- Risk of explosion if battery is replaced by an incorrect type.
- Dispose of used batteries according to the instructions.
- The product operation maximum ambient temperature is 45°C.



To prevent possible hearing damage, do not listen at high volume levels for long periods.

The symbol indicates DC voltage

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Tinlab is under license. Other trademarks and trade names are those of their respective owners.

Manufactured for: Xiaomi Communications Co., Ltd.
Manufactured by: Tinlab Acoustic Technology Limited
(a Mi Ecosystem company)
Address: Tianliao Building 1403, Tianliao Industrial Area A, Taoyuan Street, Nanshan District, Shenzhen 518055, China

For further information, please go to www.mi.com